


Stranded Loose Tube Armored & Double Sheathed Cable GYTY53

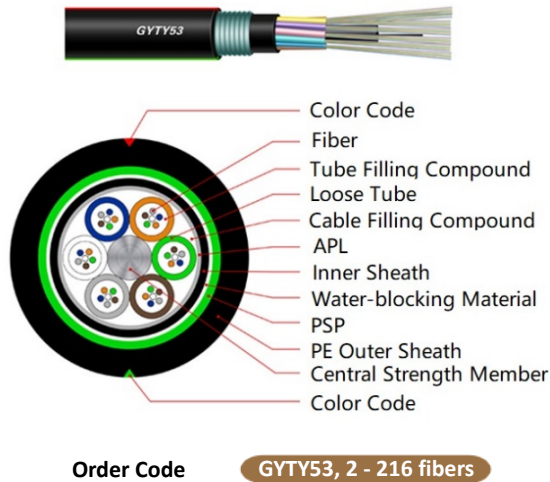

Features:

- Good mechanical and temperature performance
- High hydrolysis resistance and high strength loose tube
- Good crush resistance and flexibility
- Good moisture-proof ensured by double PSP
- High tensile strength ensured by steel wire

Application

- Access network
- Core network
- Metropolitan area network

Maxwellon TF-3103 series Stranded Loose Tube Armored & Double Sheathed Cable (GYTY53)

construction is that 250um fibers are positioned in a loose tube which is made of high modulus plastic and filled with a water-resistant filling compound; A steel wire, sometimes sheathed with polyethylene (PE) for cable with high fiber count, locates in the center of core as a metallic strength member; Tubes are stranded around the strength member into a compact and circular cable core; The cable core is filled with the filling compound to protect it from water ingress and covered with a polyethylene (PE) inner sheath; After the PSP (Steel Tape) is longitudinally applied over the inner sheath, the cable is completed with a polyethylene (PE) outer sheath.

Standards:

TF-3103 series Stranded Loose Tube Armored & Double Sheathed Cable (GYTY53) complies with YD/T901-2009 and IEC60794-1 standards.

Fiber Optic Characteristics

Parameters		Specifications			
Fiber Type		G.652	G.655	G651A1 (50/125um)	G651A1b (62.5/125um)
Attenuation (dB/km)	@850nm			≤3.0dB/km	≤3.0dB/km
	@1300nm			≤1.0dB/km	≤1.0dB/km
	@1310nm	≤0.36dB/km	--		
	@1550nm	≤0.22dB/km	≤0.23dB/km		
Bandwidth (MHz.KM)	@850			≥500MHZ · km	≥500MHZ · km
	@1300			≥1000MHZ · km	≥600MHZ · km
Numerical aperture				0.200 ± 0.015NA	0.275 ± 0.015NA
Cable cut-off wavelength		≤1260nm	≤1480nm		

Cable Specifications

Fiber Count	Cable Dia.(mm)	Cable Weight (kg/km)	Tensile Strength(N) long/short term	Crush Resistance(N) long/short term	Bending Radius (mm)
2 - 6	12.5	160	1000/3000	1000/3000	15D/30D
8-12	12.5	160	1000/3000	1000/3000	15D/30D
14-18	12.5	160	1000/3000	1000/3000	15D/30D
20-24	12.5	160	1000/3000	1000/3000	15D/30D
26-30	12.5	160	1000/3000	1000/3000	15D/30D
32-36	12.5	160	1000/3000	1000/3000	15D/30D
38-48	12.5	160	1000/3000	1000/3000	15D/30D
50-60	12.5	160	1000/3000	1000/3000	15D/30D
62-72	13.2	200	1000/3000	1000/3000	15D/30D
74-84	15.0	240	1000/3000	1000/3000	15D/30D
86-96	15.0	240	1000/3000	1000/3000	15D/30D
98-108	16.0	280	1000/3000	1000/3000	15D/30D
110-120	16.0	280	1000/3000	1000/3000	15D/30D
122-132	18.0	290	1000/3000	1000/3000	15D/30D
134-144	18.0	290	1000/3000	1000/3000	15D/30D
146-216	18.0	290	1000/3000	1000/3000	15D/30D

Storage and use temperature: -40 ° C to +70 °

Ordering Information:

TF-3103 GYTY53 outdoor cable, stranded loose tube, steel wire central strength member, single PSP armor and double PE jacket; **2-216 fibers are available. Please specify fiber type.**

Please visit **NEW** web site!

<http://www.maxwellon.com>

MAXWELLON ELECTRONIC INSTRUMENTS CO.,LTD.

NO.153 Zhuzhou Rd.,Laoshan District, Qingdao 266100, China.

Tel: 0086-532-80977508 Fax: 0086-532-80977508

E-mail: Sales@Maxwellon.com